



SPARKLE Power Dock Boost, 4 Ports of Connectivity, Built-in AC Power Module, Single 4K HDMI Output, Windows / macOS Compatible, TC-9411M

Still carrying both your laptop's AC adapter and a docking station? With the TC-9411M Power Dock Boost, you only need one device!

It replaces your laptop AC adapter and provides 4 essential ports—including USB-C, USB-A, and 4K HDMI output—delivering both power and connectivity in one compact solution.

SPECIFICATIONS

- 1x USB-C 3.2 with PD3.1 Max, 140W Host charging(5V,9V,15V,20,28V)
- 2 x USB-A 3.2 with 5V/0.9A
- 1 x HDMI 2.0 (4K @ 60Hz)
- Built-in 150W GaN Power Supply AC Input 100-240V, 50-60Hz
- Operating Temperature: 0–35°C
- Windows /MacOS /iPadOS/ Android Compatible

KEY FEATURES

- Laptop Power Adapter + Dock = Power Dock
- 4 Essential Ports of Connectivity
- 4K HDMI Video Output (HDMI 1.4 @ 60Hz)
- Built-in 150W GaN Power Supply
- Provides up to 140W USB-C Charging

VIDEO OUTPUT RESOLUTION



- 1x HDMI 1.4 (Max): 3840 x 2160@60Hz

ACCESSORY

- USB-C 3.2 C-to-C Cable 0.8m
- AC Power Cord 1.8m
- Quick Guide

DIMENSIONS

- Dimension: 80 x 113 x 34mm

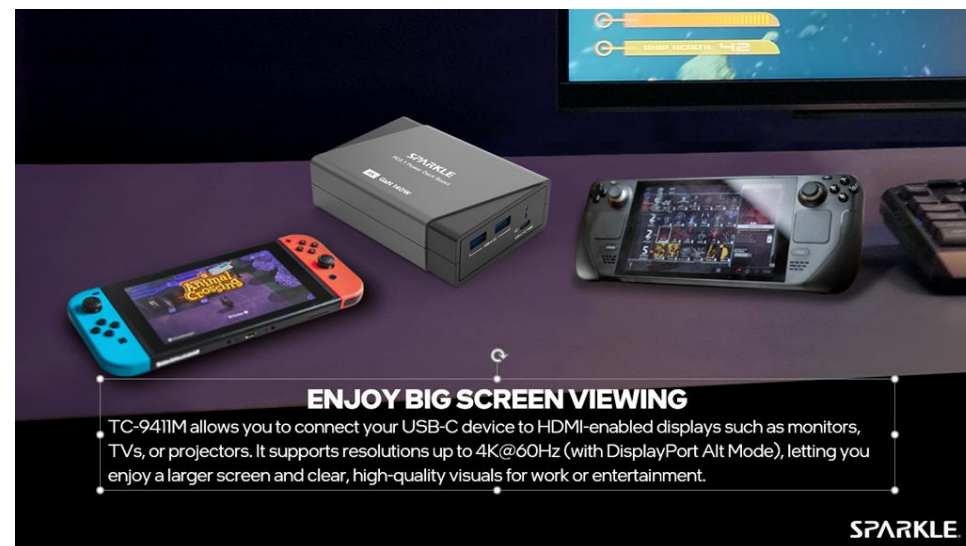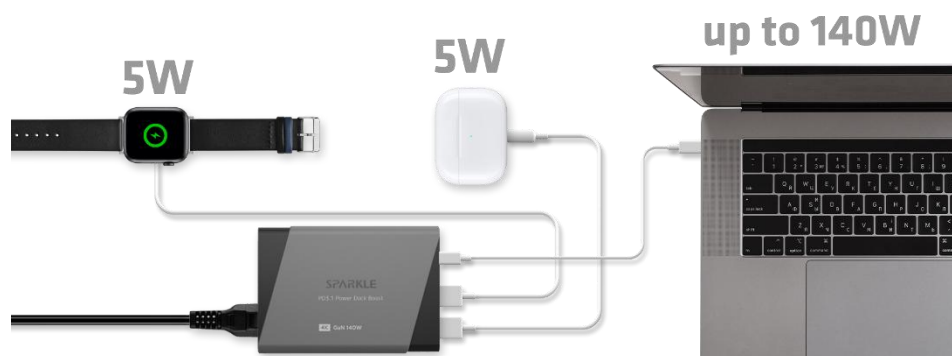

UNIVERSAL COMPATIBILITY

Compatible with USB-C 3.2 Gen2 hosts supporting DisplayPort Alt Mode. Works with Windows, macOS, iPadOS, and Android USB-C devices.

Windows® | Mac® | iPad Pro® | Samsung DeX

*<https://www.samsung.com/us/support/answer/ANS00062657/>

